

SMD VCXO 7.0x5.0mm 4 pad 3.3 - 5.0 VDC MHz

SERIES "VCXO"

FEATURES

- + High reliability for low cost
- + Frequency stability to ± 20 ppm
- + Available in 5.0 and 3.3 Volt
- + Extended temperature range -40°C to $+85^{\circ}\text{C}$
- + Applications: fibre channel, telecom, set-top box, broadband, etc.






PB FREE / ROHS-2 2011/65/EU COMPLIANT

GENERAL DATA

PARAMETERS		PRODUCT FEATURES AND CONDITIONS	
SMD-OSCILLATOR SERIES		SMD-VCX04	
PACKAGE		Ceramic package 7.0 x 5.0 x 1.8 mm ³	
FREQUENCY RANGE		1.0 ~ 40.0 MHz	
FREQUENCY STABILITY		± 20 ppm / ± 25 ppm / ± 50 ppm	
OPERATING TEMPERATURE RANGE		$-20/+70^{\circ}\text{C}$ ~ $-40/+85^{\circ}\text{C}$	
STORAGE TEMPERATURE RANGE		$-55/+125^{\circ}\text{C}$	
INPUT	VOLTAGE	$+3.3\text{VDC} \pm 5\%$ / $+5.0\text{VDC} \pm 5\%$	
	CURRENT	25 mA max.	
OUTPUT	SYMMETRY	STANDARD	40/60%
		OPTION	45/55%
	SIGNAL	CMOS/HCMOS	
	RISE AND FALL TIME	8 ns max.	
	"0" LEVEL	CMOS/HCMOS	0.4VDD max. or 10% VDD max.
	"1" LEVEL		2.4VDD min. or 90% VDD min.
LOAD	15 pF ~ 30 pF		
START-UP TIME		10 mS max.	
INPUT IMPEDANCE		10 kW min.	
MODULATION BANDWIDTH (BW)		5 kHz min.	
CONTROL VOLTAGE RANGE		$1.65\text{VDC} \pm 1.35\text{VDC}$ for $+3.3\text{VDC}$ / $2.5\text{VDC} \pm 2.0\text{VDC}$ for $+5.0\text{VDC}$	
CENTER VOLTAGE		1.65VDC for $+3.3\text{VDC}$ / 2.5VDC for $+5.0\text{VDC}$	
PULLING RANGE		± 50 ppm ~ ± 100 ppm min.	
LINEARITY		10% max.	
SLOPE		POSITIVE	
PHASE NOISE		-70dBc/Hz @10Hz	
		-130dBc/Hz @10kHz	
PIN CONNECTION	PIN 1	CONTROL VOLTAGE	
	PIN 2	GROUND	
	PIN 3	OUTPUT	
	PIN 4	SUPPLY VOLTAGE	
DELIVERY FORM		Tape and Reel / 1.000 pcs. per reel, lower QTY possible	
OTHER PARAMETERS ARE AVAILABLE ON REQUEST / CREATE HERE YOUR SPECIFICATION			




OUTLINE DRAWING

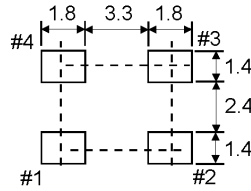

PIN	FUNCTION
#1	VOLTAGE CONTROL
#2	GROUND
#3	OUTPUT
#4	VDD


Unit:mm

REEL SPECIFICATION

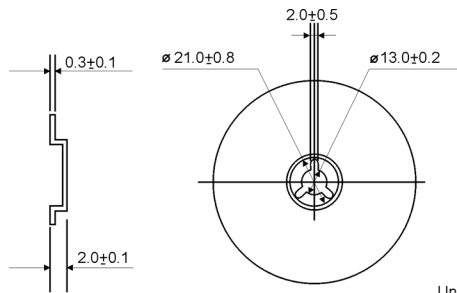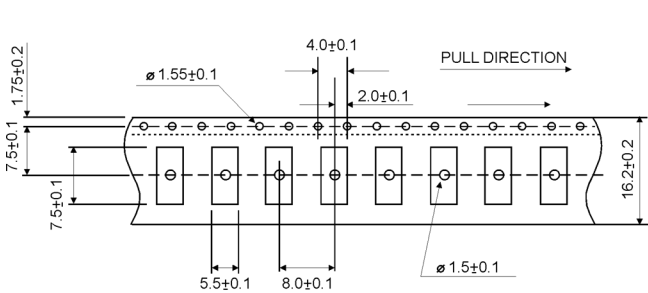

Unit: mm



TEST CIRCUIT CMOS/HMOS

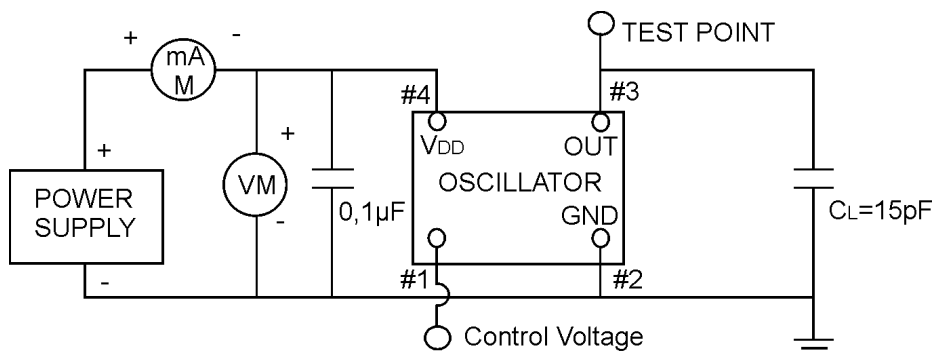


NOTE: CL includes probe and fixture capacitance

REFLOW SOLDER PROFILE

CMOS/HCMOS LOAD

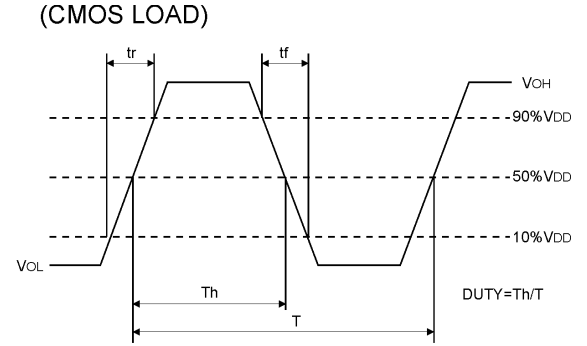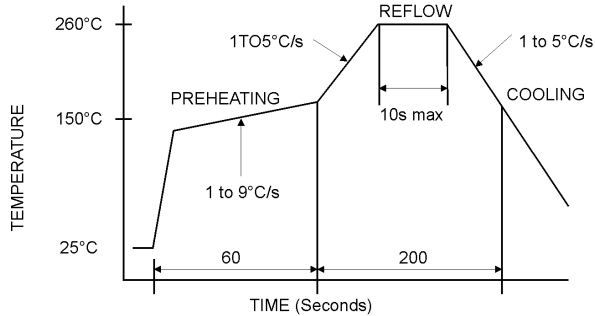

ORDERING INFORMATION

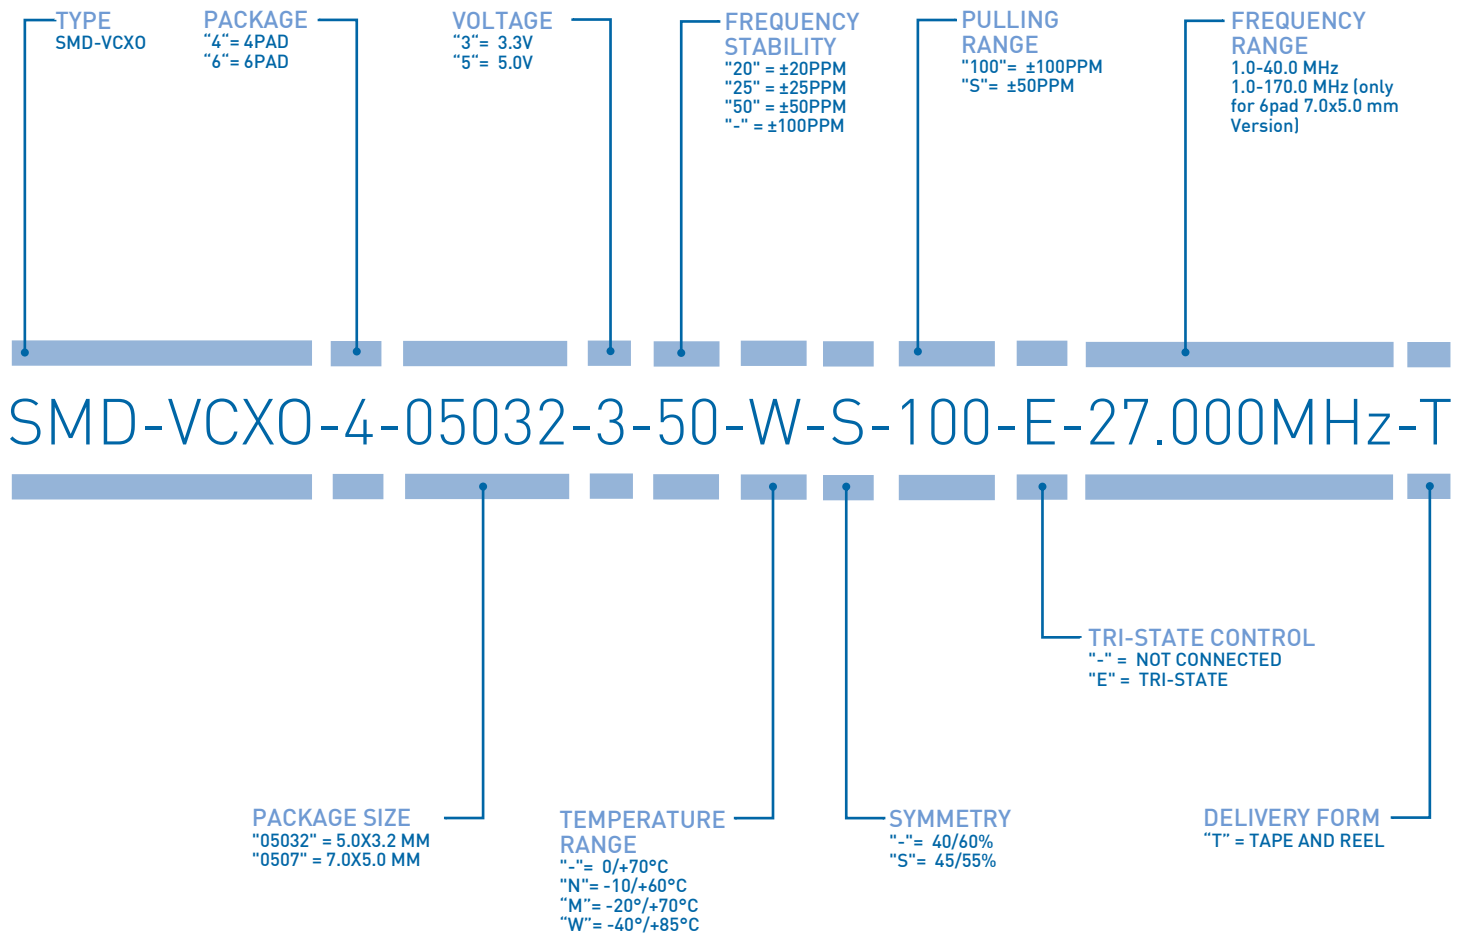

EXAMPLE: SMD-VCXO-4-05032-3-50-W-S-100-E-27.000MHZ-T
PLEASE INDICATE YOUR REQUIRED PARAMETERS



PREMIUM QUALITY BY PETERMANN-TECHNIK



OUR COMPANY IS CERTIFIED ACCORDING TO ISO 9001:2015 IN OCTOBER 2016 BY THE DMSZ CERTIFIKATION GMBH.

THIS IS FOR YOU TO ENSURE THAT THE PRINCIPLES OF QUALITY MANAGEMENT ARE FULLY IMPLEMENTED IN OUR QUALITY MANAGEMENT SYSTEM AND QUALITY CONTROL METHODS ALSO DOMINATE OUR QUALITY STANDARDS.